



# LogHog®

**FASTER EASIER STRONGER**

The FastenMaster LogHog is an extra heavy-duty log home fastener, engineered for specific log home construction applications. The LogHog, with its oversized head, thicker diameter and additional thread, offers increased draw down and holding power.

## Features & Benefits:

- No predrilling
- Self countersinking headstyle
- Increased draw down power for warped logs
- Increased holding power
- Removable
- Corrosion resistant
- No sledge hammer damage
- Greatly reduced labor time
- 100% American Made




**For more information or free samples,  
call OMG at 800-633-3800.**

**THE FEATURES OF THE FASTENMASTER LOGHOG® INCLUDE:**

- Oversized washer head and increased thread combine for dramatically increased pull down for warped and twisted logs.
- Installs much faster and easier than lags & spikes
  - Saves time and fatigue
  - Dramatically lowers installed cost
- Requires no predrilling
  - Eliminates on-site predrilling
  - Eliminates manufacturing drill stations
- Countersinks into log
  - Allows log to settle naturally
- Removable and reusable
- Eliminates jarring and damage caused by a sledge hammer
- Engineered for increased strength and performance

For complete engineering data, please see our official ICC ESR-1078 report at:  
[www.icc-es.org/reports/pdf\\_files/ICC-ES/1078.pdf](http://www.icc-es.org/reports/pdf_files/ICC-ES/1078.pdf)

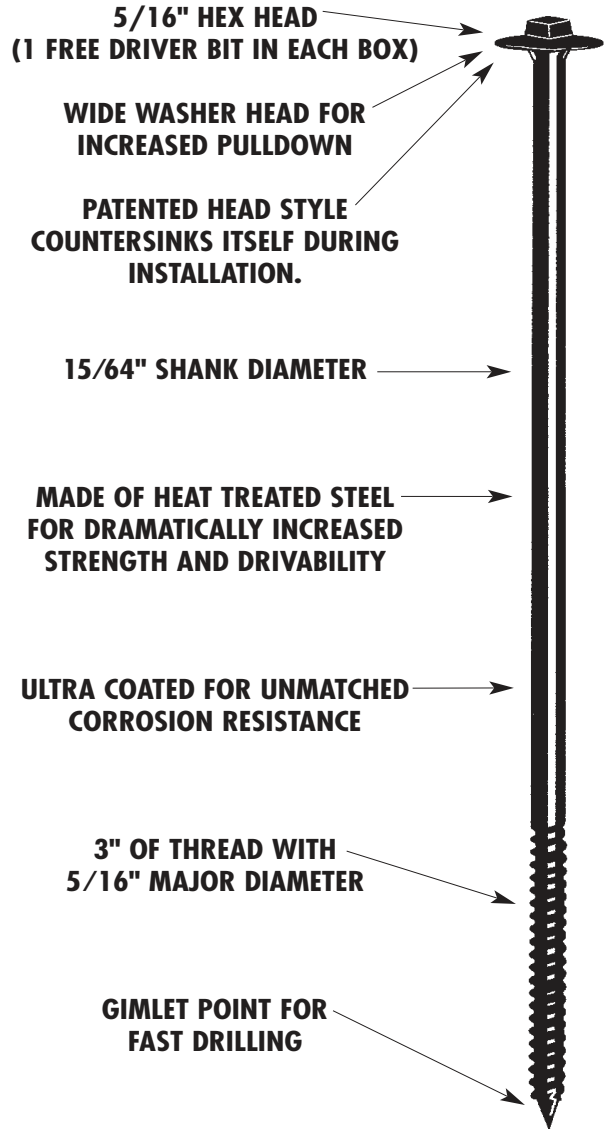

| PHYSICAL DATA   | Cat. No.   | Length | Thread Length | Packaging* | Weight |
|---|------------|--------|---------------|------------|--------|
| <b>Thread Diameter:</b> .320  | LHOG009-25 | 9"     | 3"            | 25         | 12 lb  |
| <b>Shank Diameter:</b> .229   | LHOG011-25 | 11"    | 3"            | 25         | 16 lb  |
| <b>Head Style:</b> Hex Head   | LHOG012-25 | 12"    | 3"            | 25         | 16 lb  |
|   | LHOG013-25 | 13"    | 3"            | 25         | 16 lb  |
|   | LHOG015-25 | 15"    | 3"            | 25         | 20 lb  |
| <b>*Indicates quantity per box. One special hex head driver bit and heavy duty washers in each box.</b> | LHOG007    | 7"     | 3"            | 250        | 22 lb  |
|   | LHOG009    | 9"     | 3"            | 250        | 28 lb  |
|   | LHOG010    | 10"    | 3"            | 250        | 31 lb  |
|   | LHOG011    | 11"    | 3"            | 250        | 34 lb  |
| <b>**25 packs are packaged 4 per master carton.</b>   | LHOG012    | 12"    | 3"            | 250        | 37 lb  |
|   | LHOG013    | 13"    | 3"            | 250        | 40 lb  |
|   | LHOG015    | 15"    | 3"            | 150        | 28 lb  |

- INSTALLATION INSTRUCTIONS**
- Use a 1/2", high torque, low RPM drill.
  - Install LogHog perpendicular to the log.
  - Countersink the LogHog a minimum of 1/4".

FM07166-TOM-AMV