

Wood Wash: A ready to use formula that removes extreme weathering, water stains, mold and mildew while restoring the natural color of wood. Sansin Wood Wash is biodegradable, rinses off with water and is easy to use.

FEATURES

- For exterior surfaces
- Restores wood to its natural color
- Removes dirt, algae, mold, mildew and water stains
- Non flammable
- Comes with Sansin Wood Lightener®

IMPORTANT

Product Data Sheets are based on "ideal" work conditions. Due to wood variability and varying environmental conditions, it is strongly recommended that the end-user needs to determine that the application conditions, coating product system, and techniques are suitable to reach the desired results. Please see Conditions of Sale.

APPLICATIONS

Recommended for use on new and old wood surfaces such as decks, fences, siding, logs, board and batten and timbers.

CHARACTERISTICS

- Coloring.....Green
- Odor.....Low
- Form.....Liquid
- Specific Gravity (g/cm3).....1.00-1.05
- Density (lbs/gal).....8.3- 8.4
- pH.....12.5-13
- Viscosity, @Zahn 3 @21°C.....18 sec+/- 1 sec
- Solvents.....N/A
- Freezing Point.....0°C
- Diluent.....Water
- Cleanup.....Soap & Water
- Drying Time (To touch) @ 20°C (68°F).....Do not allow to dry
- Coverage (Depending on coating appearance and thickness).....100-200 sq.ft./US gal.
- Shelf life.....Loses strength slowly over time
- Solids.....< 1%
- VOC (g/l).....0 g/l

PACKAGING

Available in 1 gallon US plastic containers with 1 bag of Sansin Wood Lightener®.

PREPARATION

- Substrate must be dry.
- Temperature above 10°C (50°F).
- Spray vegetation with water or shield off before and during application.
- Protect bordering areas with drop sheets and/or tape off with poly.
- Do not allow this product to come in contact with metal, fabric, floor coverings or outdoor furniture.

APPLICATION METHODS

- Apply liberal and uniform application using brush, roller or spray.
- On vertical surfaces start at the bottom and work up.

WORKING PROCEDURE

- Do not allow to dry as this will require reapplication.
- Must lightly mist with water to keep active.
- Do not apply in direct sunlight.
- Allow the product to dissolve coating for at least 15 minutes.
- During waiting period you may agitate coating using a stiff brush. Always agitate in direction of wood grain.
- Thoroughly rinse the surface using a garden hose or low pressure power washer (max pressure 500psi).
- Direct the power washer wand with the grain of the wood.
- Do not stop the wand on the wood as this may mark the wood surface.
- Allow the wood to dry completely before proceeding to step 2.

STEP 2: Application of Sansin Wood Lightener®

- Dissolve the bag of Sansin Wood Lightener® in 1.5 – 2.0 gal (5.75 – 7.5 L) of water depending on the degree of brightening you require.
- Spray the Wood Lightener evenly on cleaned wood surface.
- Allow the Wood Lightener® to neutralize the treated wood surface for at least 10 minutes.
- Rinse off with water.
- Allow the wood to completely dry before sanding.
- On smooth surfaces always sand using a variable speed random orbital sander with 60-80 grit sand paper to prepare a beautiful finish.
- See Directions For Use on Sansin Wood Lightener® bag.

STORAGE

- Close container tightly.
- Store in a cool dry place.
- Avoid exposure to sunlight.
- Do not reuse container.
- Do not allow freezing.
- Rinse container thoroughly before disposal.

SAFETY

See Material Safety Data Sheet.

Wood Wash

ENVIRO STAIN®



EASY TO
USE

NON
FLAMMABLE


RESTORES
WOOD

ECO
FRIENDLY



SANSIN®

Wood Wash

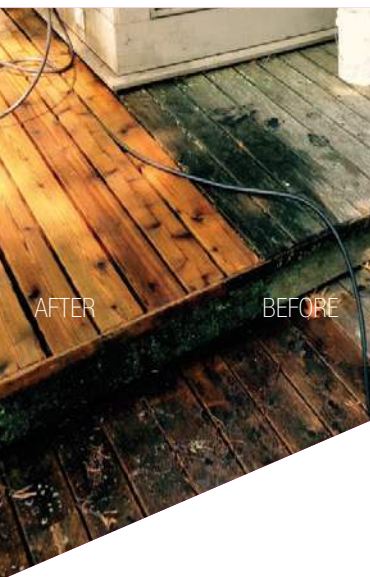

WARNING TO USERS

Contains Sodium Hydroxide. Avoid contact with skin and mucous membranes. Wear protective gear during application: ie rubber gloves, rubber pants, rubber coat, rubber boots goggles, and a NIOSH/MSHA approved respirator when spraying. Project surfaces become extremely slippery when working. Avoid walking on surface while wet. Keep out of reach of children, if swallowed immediately drink two glasses of orange juice. The information contained in this document is given in good faith based on our current knowledge. The use of the product is beyond the control of The Sansin Corporation, and no guarantees, expressed or implied, are made as to the result to be obtained if not used in accordance with the published Directions for Use. The Sansin Corporation does not assume any legal responsibility for use or reliance on same. This information must on no account be used as a substitute for necessary field tests, which alone can ensure that the product is suitable for the expected use. Before using any product read its label.

CONDITIONS OF SALE

The only obligation of the manufacturer and seller shall be to replace such quantity of Sansin product that is proven to be defective. Proof of purchase is required. Seller or manufacturer shall not be liable for any loss or damage connected with the use and/or handling of this product. All labor costs are specifically excluded. User should determine suitability of product for the intended use before application. User assumes all risk and liability in connection therewith. This warranty is expressly made in lieu of any and all other rights, warranties, conditions and remedies, express or implied, including but not limited to any implied warranty or condition of merchantability, fitness for a particular purpose, and any warranty or condition arising out of a course of dealing, a custom or usage of trade. If any distributor or seller of product offers warranties or remedies which differ from those offered by Sansin, Sansin accepts no responsibilities for such warranties or remedies.

© ALL RIGHTS RESERVED
JULY 2019

